


BOTTOM
CENTER
MOUNTED

NOTE: NOT TO SCALE

2"x2"x14 GAUGE SIGN POST
(CUT POST TO MEET
SPECIFIED SIGN HEIGHT)

7'-MIN.

ANCHOR/SLEEVE DETAIL

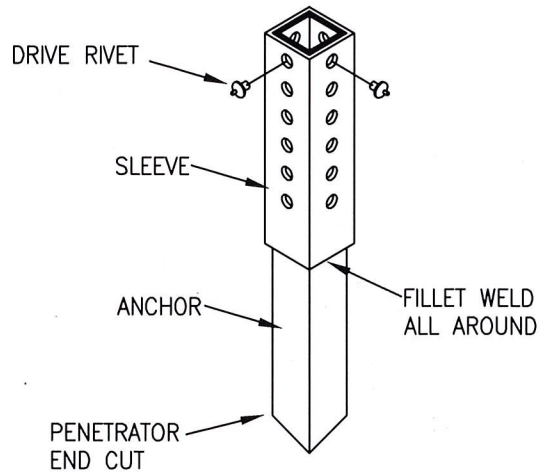

DRIVE RIVET

SLEEVE

ANCHOR

FILLET WELD
ALL AROUND

PENETRATOR
END CUT

SECURE USING
3/8" ZINC PLATED
DRIVE RIVETS ON
TWO ADJACENT
SIDES OF POST

TWO
ANCHOR
HOLES
ABOVE
GROUND

TOP OF
SIDEWALK

FACE OF CURB

18" MIN.
CLEARANCE

2-1/2" x 2-1/2"
x 12 GAUGE SLEEVE
MIN. LENGTH = 12"

2-1/4" x 2-1/4" x 12 GAUGE
PENETRATOR POINTED ANCHOR
MIN. DEPTH = 24" (CONCRETE SURFACE)
MAX. DEPTH = 30" (UNFINISHED SURFACE)

CITY OF OAKLAND

BUREAU OF ENGINEERING AND CONSTRUCTION



STANDARD SIGN POST DETAIL

[Signature]

TRANSPORTATION SERVICES MANAGER

DATE: July 2016
REV. DATE: _____

DWG.

T-4