



NOTES:

1. PROVIDE 6" MIN. VERTICAL CLEARANCE BETWEEN SEWER LATERAL AND UTILITY INSTALLATION.
2. EXISTING SEWER LATERAL AT CONNECTION WITH CAST IRON PIPE OR DUCTILE IRON PIPE SHALL BE FREE OF DEFECTS. REPLACE WHERE REQUIRED.

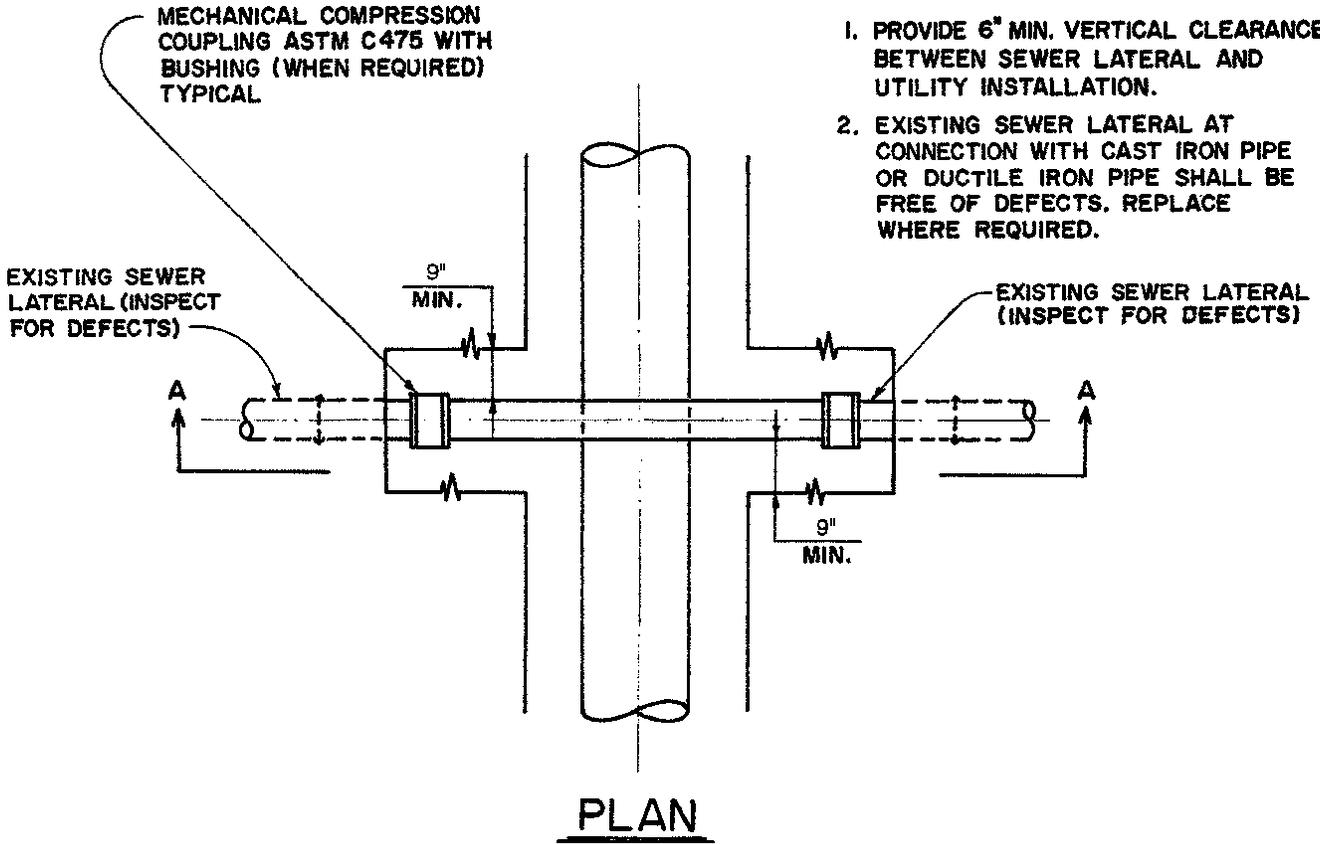

PLAN

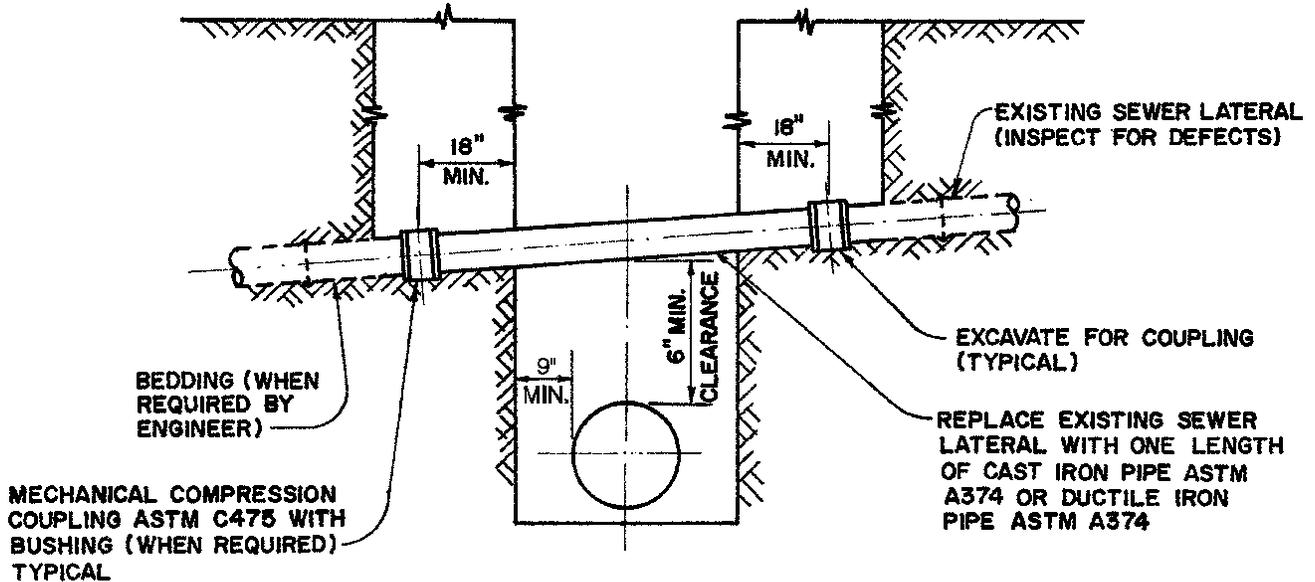

SECTION A-A

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE. THE SIGNED CITY OF OAKLAND STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION IS AVAILABLE FOR PURCHASE FROM THE CONTRACT ADMINISTRATION DEPARTMENT.

CITY OF OAKLAND

DESIGN AND CONSTRUCTION SERVICES DEPARTMENT



UTILITY CROSSING UNDER SEWER LATERAL

ENGINEERING DESIGN MANAGER

DATE: JANUARY 2002

DWG.

REV. DATE: _____

D-33