


8' WIDE

7' WIDE

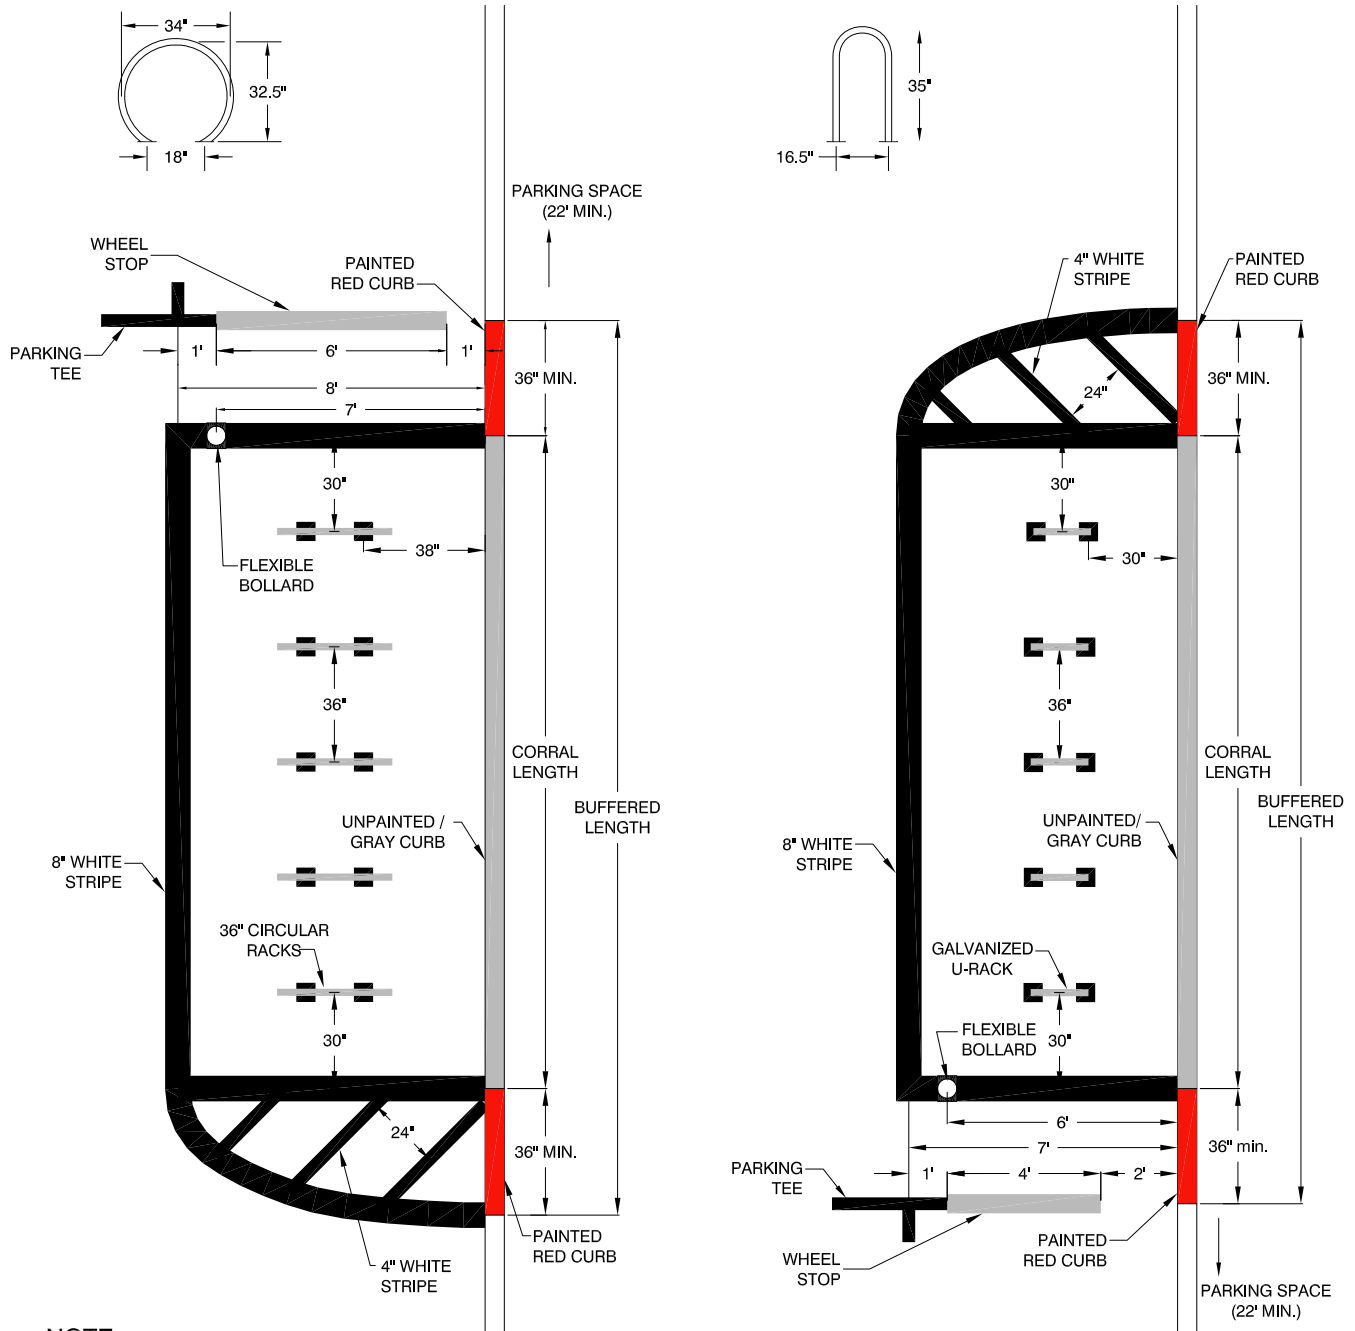

NOTE:

- Corral layout will vary based on the number of racks as well as on site conditions including adjacent lane width, presence of obstructions, location and use of adjacent driveways and crosswalks, etc. When more than the minimum length is available, the design is modified to create longer internal or external buffers, to increase the space between racks, or to install the racks on an angle.
- Angled installation (not shown) will decrease the extension of parked bikes towards the travel lane while requiring more length to maintain the recommended 36" spacing between, and perpendicular to, the racks. See table on page 3.



CITY OF OAKLAND

BUREAU OF ENGINEERING AND CONSTRUCTION
BICYCLE FACILITIES PROGRAM
250 FRANK H. OGAWA PLAZA, SUITE 4344 * OAKLAND CA, 94612
(510) 238-3466 * FAX (510) 238-7415

TYPICAL CORRAL LAYOUTS

SHEET 1 OF 6

BIKE CORRAL DETAILS

SCALE: NTS

DWG. NO.

DATE: JUL 2016

RC-1